

WHEEL-FREE SCISSOR LIFT

HL-32D



ABOVE-GROUND



IN-GROUND



HESHBON® Your Source of Excellent Equipment

Information of this catalogue is subject to change without prior notice to improve quality




HL-32D / 3.3ton



1 Mechanical locking system

- Mechanical locking device with automatic engagement and pneumatic release, ensuring safety.



2 Adjustable extension ramp

- Flexibility for working at a wide range length of vehicle.
- Removable the stopper which make possible to drive in and out both side.



3 Hydraulic synchronization

- Master & Slave synchronization system.



4 Rubber Pads

- Rubber pads provide the convenience to prevent the chassis of the vehicle from being damaged.



5 Dual extension platform

- Maximum strength and stability complements.
- Flexibility for working at a wide range length of vehicle.



6 15,000 times cycle test

- Verify durability and reliability through 15,000 times cycle testing with optimum load.





7 Maximum lifting height 1,956mm



- Effective lifting stroke of 1,956mm provide enough working space under the vehicle.

>> LAY OUT

ABOVE-GROUND

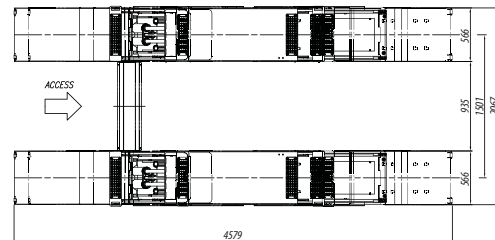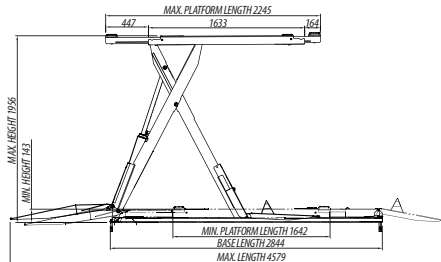

IN-GROUND

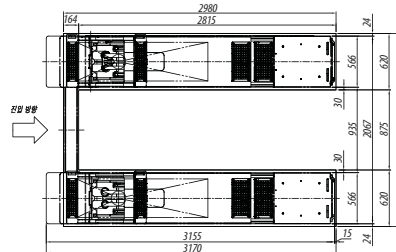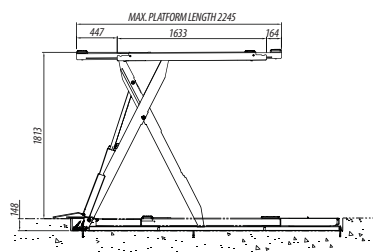

>> SPECIFICATION

Model No.	HL-32D / ABOVE-GROUND	HL-32D / IN-GROUND
Dimension	4,579(L) x 143(H) x 2,067(W) mm	3,155(L) x 143(-FL)(H) x 2,067(W) mm
Max.Lifting Height	1,956 mm	1,813 mm
Lifting Time	55~65 sec.	55~65 sec.
Lowering Time	50~65 sec. / Min.Height : 143 mm	50~65 sec.
Lifting Capacity	3,300 kg	3,300 kg
Power Supply & Motor	1PH : 2.5HP x 4P x 220V x 50/60Hz 3PH : 2HP x 4P x 220/380V x 50/60Hz	1PH : 2.5HP x 4P x 220V x 50/60Hz 3PH : 2HP x 4P x 220/380V x 50/60Hz
Net Weight	1,150 kg	1,150 kg



HESHBON

108, Robot land-ro 249beon-gil, Seo-gu, Incheon 404-170, KOREA
TEL:+82-1577-3520(Representative) / +82-32-585-3570(Overseas sales)
FAX:+82-32-585-3535 <http://www.heshbon.com> e-mail: export@heshbon.com