




HESHBON®

HESHBON **4POST LIFTS**




**4POST
LIFT**

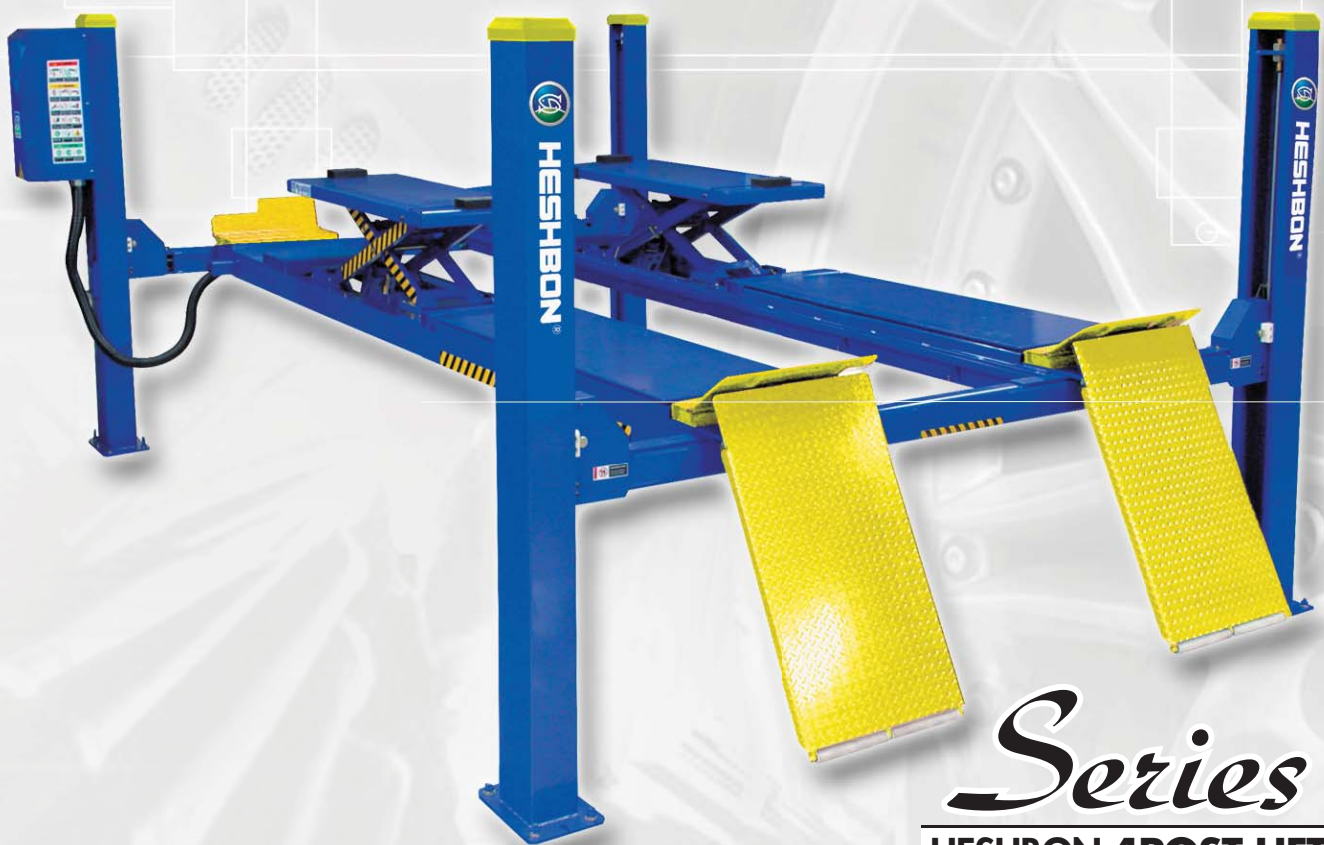

Series

HESHBON 4POST LIFT



- **HL-3300W**
- **HL-42L**
- **HL-42F**
- **HL-46H**
- **HL-410A**

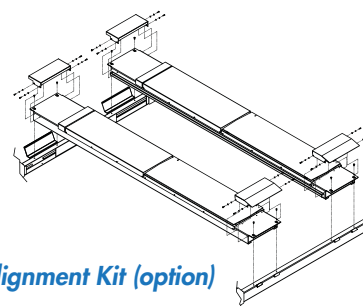


Alignment Kit (option)

HL-3300W 4POST FLAT PLATFORM LIFT 4,000KG / Platform length : 4,210mm

- The hydraulic cylinder is located inside the fixed platform and is thus perfectly protected.
- High-resistant, galvanised and pre-stretched metal cables.
- Large-diameter pulleys with self-lubricating and maintenance-free bushes.
- Adjustable parking ratchet rails ensure that the platforms and cross members are horizontal within 4-wheel alignment tolerances.
- Automatic spring-loaded eccentric brake system in the event of cable breakage also ensures complete stability during parking.

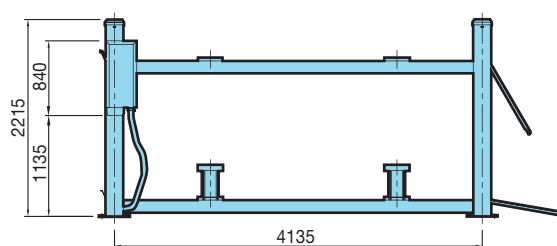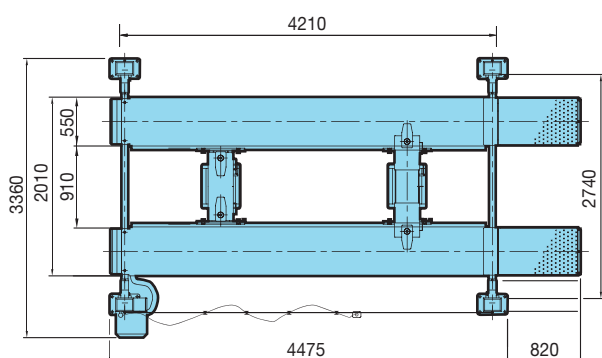

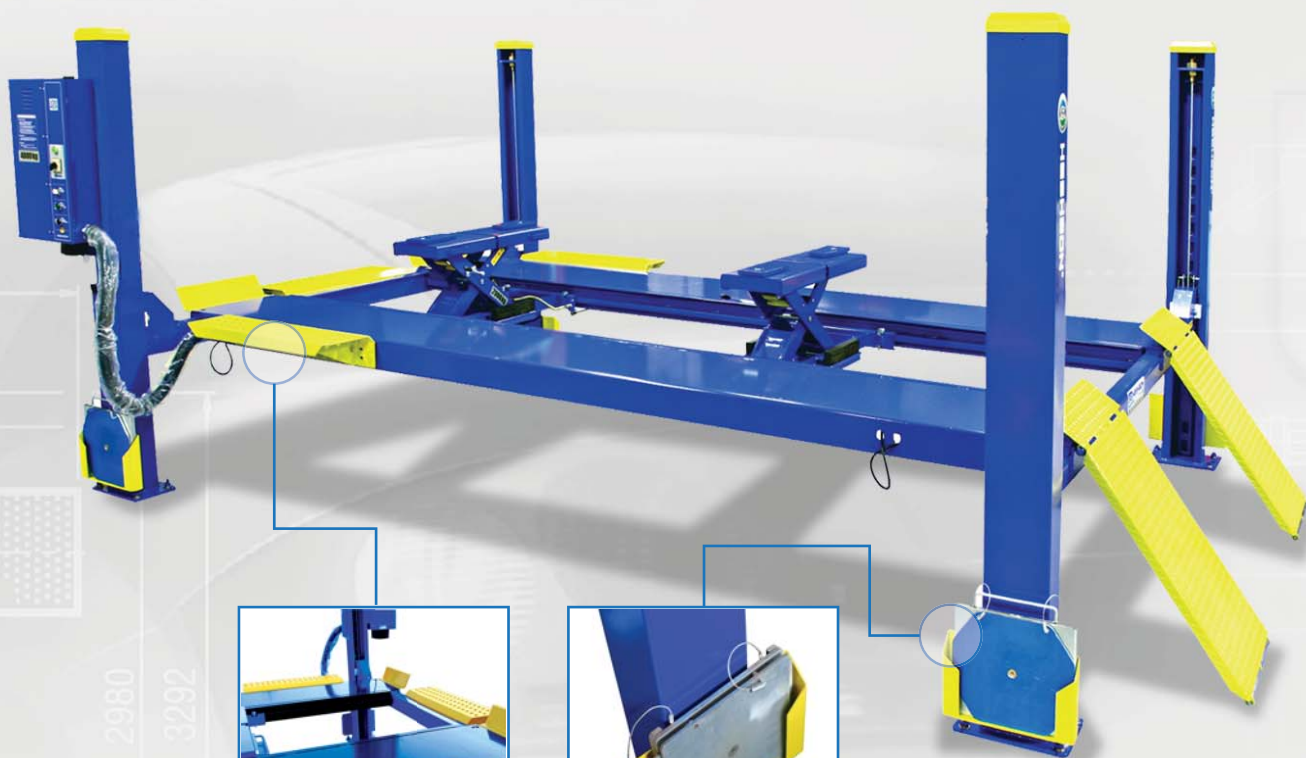

Stage for the alignment job(option)





Pocket for turn table(option)


HL-42L

4POST FLAT PLATFORM LIFT

4,500KG / Platform length : 4,510mm

- The hydraulic cylinder is located inside the fixed platform and is thus perfectly protected.
- High-resistant, galvanised and pre-stretched metal cables.
- Large-diameter pulleys with self-lubricating and maintenance-free bushes.
- Adjustable parking ratchet rails ensure that the platforms and cross members are horizontal within 4-wheel alignment tolerances.
- Automatic spring-loaded eccentric brake system in the event of cable breakage also ensures complete stability during parking.
- The long platforms and the large inner distance between posts allow lifting of light commercial vehicles and long-wheel base vans.

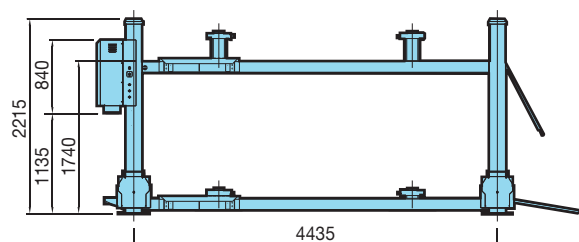
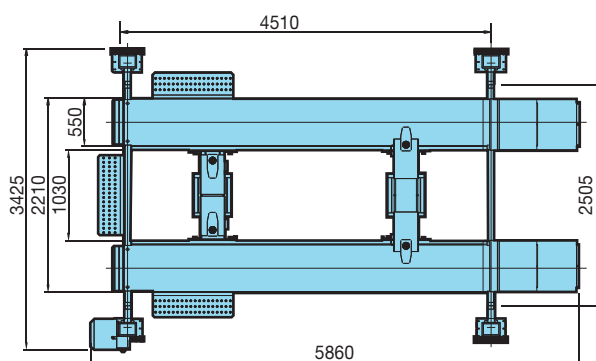


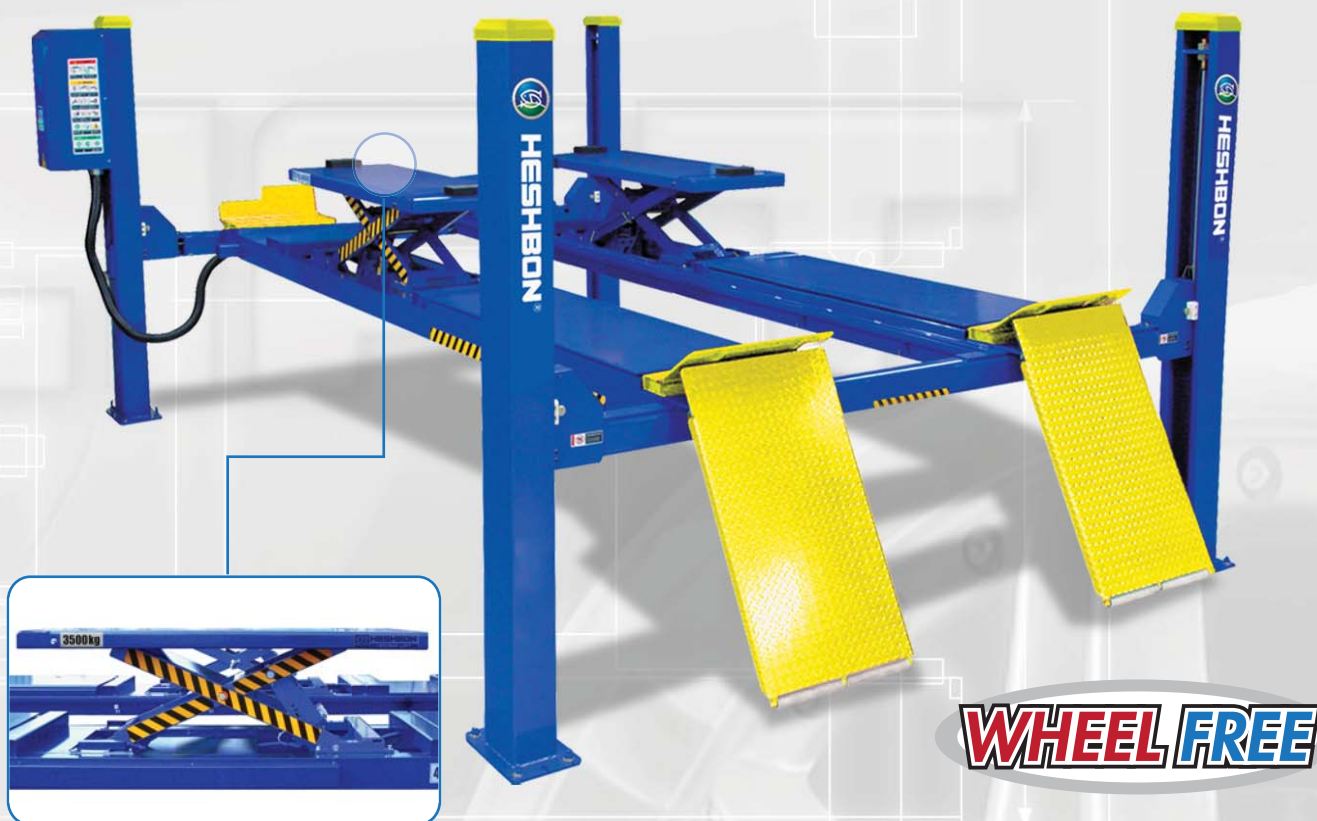

Wheel free jack
with 3ton capacity.

HL-42F 4POST WHEEL ALIGNMENT LIFT **4,000KG / Platform length : 4,500mm**

- The hydraulic cylinder is located inside the fixed platform and is thus perfectly protected.
- High-resistant, galvanised and pre-stretched metal cables.
- Large-diameter pulleys with self-lubricating and maintenance-free bushes.
- Adjustable platform to accomodate different vehicle tracks and optimised access to vehicle underside.
- Adjustable parking ratchet rails ensure that the platforms and cross members are horizontal within 4-wheel alignment tolerances.
- Automatic spring-loaded eccentric brake system in the event of cable breakage also ensures complete stability during parking.
- The long platforms and the large inner distance between posts allow lifting of light commercial vehicles and long-wheel base vans.
- Platforms for total wheel alignment with front turning plates locations and rear slip plates.

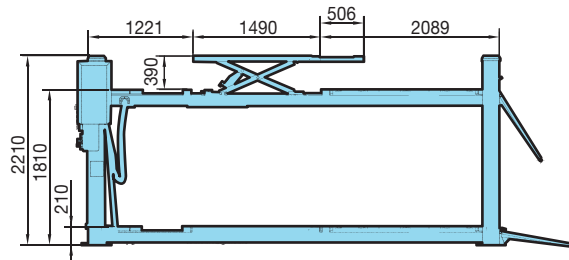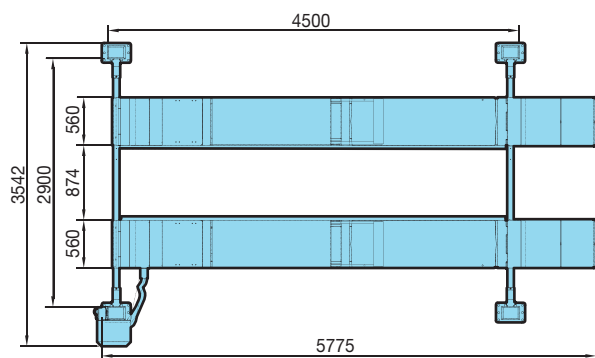



4POST FLAT PLATFORM LIFT


- [illegible]

**HESHBON®**

HL-410A 4POST FLAT PLATFORM LIFT

10,000KG / Platform length : 7,300mm

- The hydraulic cylinder is located inside the fixed platform and is thus perfectly protected.
- High-resistant, galvanised and pre-stretched metal cables.
- Large-diameter pulleys with self-lubricating and maintenance-free bushes.
- Adjustable parking ratchet rails ensure that the platforms and cross members are horizontal within 4-wheel alignment tolerances.
- Automatic spring-loaded eccentric brake system in the event of cable breakage also ensures complete stability during parking.
- The long platforms and the large inner distance allow lifting of the all kind of trucks.

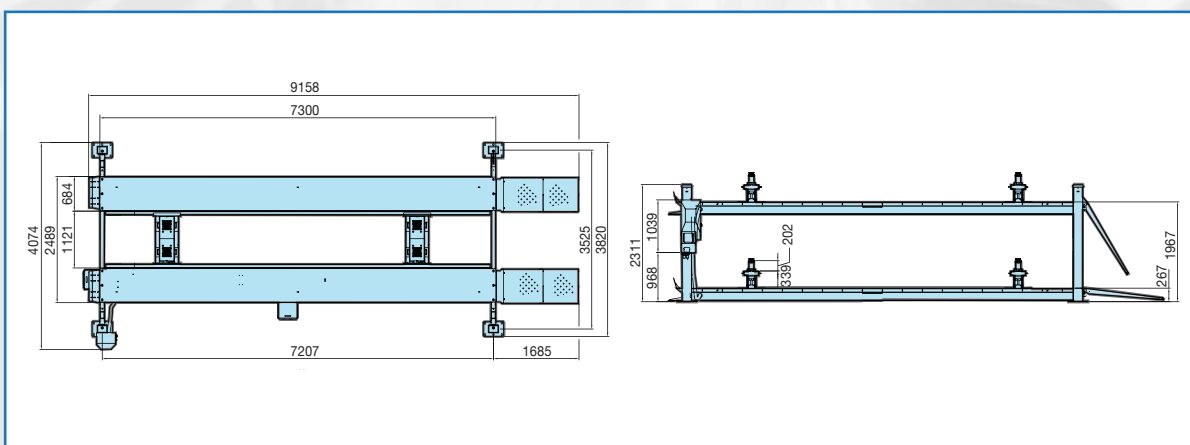**HESHBON CO., LTD.**

410-2, HANJIN-RI, SONGAK-MYUN, DANGJIN-GUN, CHUNGNAM, KOREA, 343-823
 TEL : 82-41-351-3500 FAX : 82-41-351-3535
<http://www.heshbon.com> e-mail : trade@heshbon.com