


# Series

## HESHBON 2POST LIFT

# HL-26K

- Automatic arm restraints.
- Manually operated lock release device.
- Multiple telescopic pick up arms.
- Upper limit protection bar.
- RAM type cylinder and synchronization wire rope.

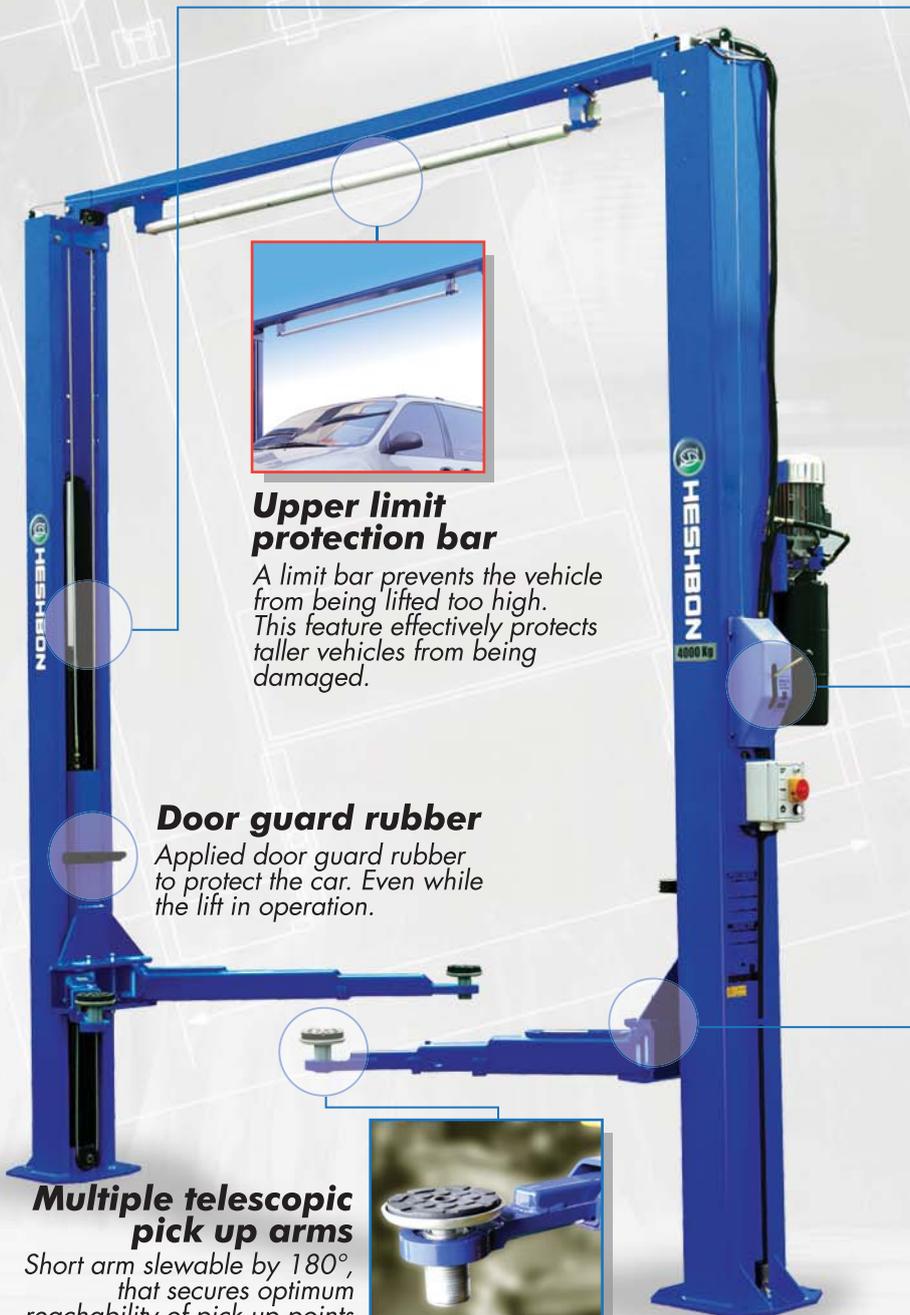

### Upper limit protection bar

A limit bar prevents the vehicle from being lifted too high. This feature effectively protects taller vehicles from being damaged.



### Door guard rubber

Applied door guard rubber to protect the car. Even while the lift in operation.



### Multiple telescopic pick up arms

Short arm slewable by 180°, that secures optimum reachability of pick up points at small and large vehicles.



### Baseframe-free design

baseframe-free column design, no interfering connections on the floor.



### Operation of RAM type cylinder

High-pressure cylinders in each column provide maximum lifting force and smooth operation.




### Manual lock release



### Automatic arm restraints

The supporting arms are automatically locked in position during the lifting operation. Once the lift has been completely lowered this interlock is automatically released.

The energy-efficient electro-hydraulic design provides for low noise and effective work.

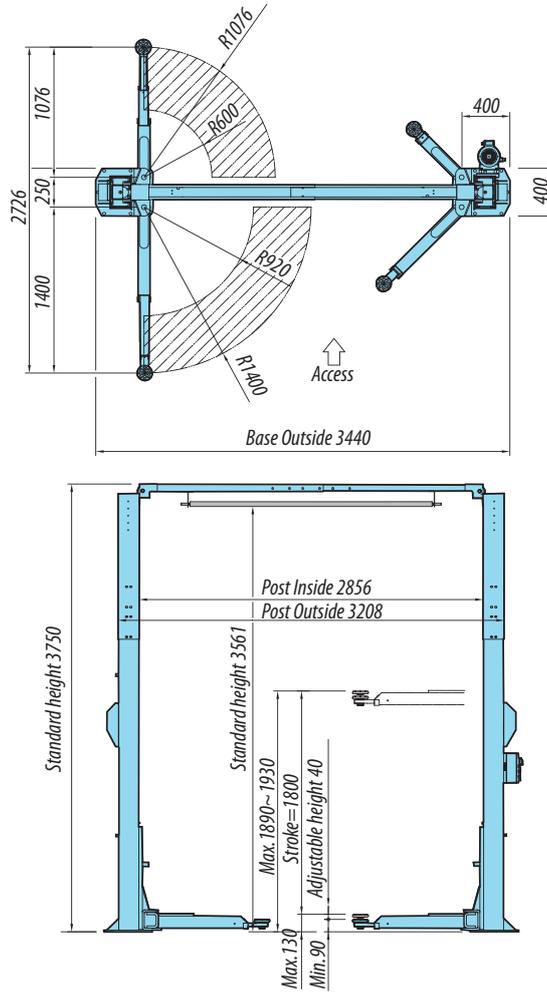**LAY-OUT : HL-26K**

**SPECIFICATION**

Model	HL-26K
Model No.	HL-26K
Lifting Capacity (kg)	4,000 kg
Max.Lifting Height (mm)	1,890 ~ 1,930 mm
Dimension (mm)	2,726(L) X 3,440(W) X 3,750(H)
Power Supply & Motor	1ph : 2.5HP, 4P, 220V, 50/60Hz 3ph : 2HP, 4P, 220/380V, 50/60 Hz
Net Weight	760 kg