




Option	Outground Installation Kits	Inground Installation Kits
		

LAY-OUT : HL-32X



SPECIFICATION

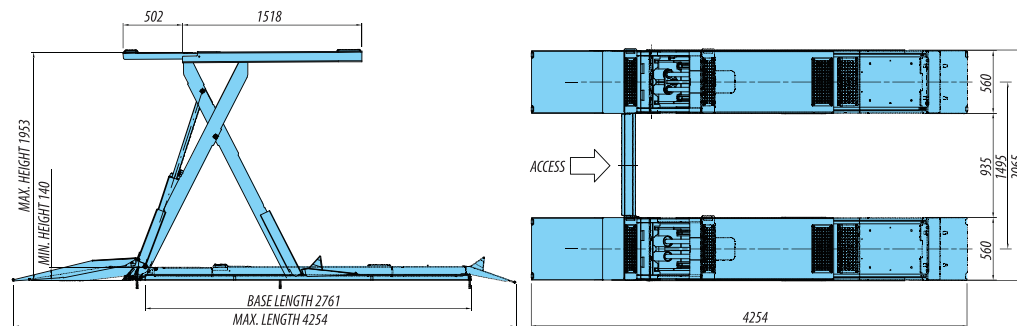Model No.	HL-32X
Dimension (mm)	4,254(L) X 140(H) X 2,065(W)
Max. Lifting Height (mm)	1,953 / 1,820(Inground)
Min. Lifting Height (mm)	140 mm
Lifting Time	55 ~ 65 sec
Lowering Time	50 ~ 65 sec
Lifting Capacity (kg)	3,300 kg
Power Supply & Motor	1ph : 2,5HP X 4P X 220V X 60Hz 3ph : 2HP X 4P X 220,380V X 60Hz
Weight	1,050 kg



108, Robot land-ro 249beon-gil, Seo-gu, Incheon 404-170, KOREA
TEL:+82-1577-3520(Representative) / +82-32-585-3570(Overseas sales)
FAX:+82-32-585-3535 <http://www.heshbon.com> e-mail:export@heshbon.com

HL-32X

HESHBON SCISSORS LIFTS 3.3TON

The hydraulic synchronization system with automatic leveling function prevents uneven lifting or lowering of the load.

- No cross rails or torsion bars between lifting platforms (for maximum accessibility in the working area).
- Space saving when lift is all raised.
- Completely free floor space when lift is fully lowered.



SCISSORS
LIFT

HL-32X(3.3ton)



Series
HESHBON SCISSORS LIFT
HL-32X

Series

HESHBON SCISSORS LIFT

HL-32X

- Adjustable extension ramp
- Compatible with inground and above ground
- Extra low profile version.
- Mechanical locking device.
- Rubber pad.




SCISSORS
LIFT

8
3.3TON

7
**Compatible
with inground
and above ground**

6
Inground type

Extremely powerful models for in ground installation. The low space requirement and the lack of mechanical connections between the ramps render them the ideal partner for general service work.

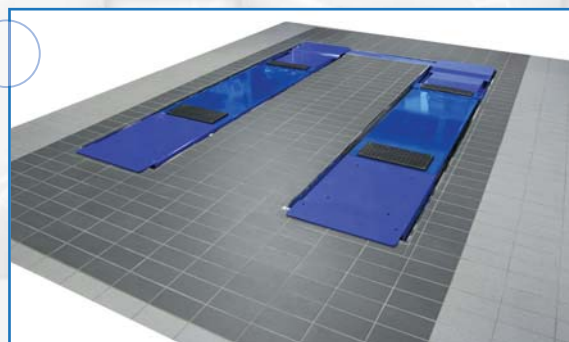

9
Control Box

The control console features an integrated hydraulic unit and thus considerably helps reduce the installation effort.



Platform slide extension




Rubber pad

Rubber pad provides the convenience to prevent the chassis of the vehicle from being damaged.




Mechanical locking device

Mechanical locking device with automatic engagement and pneumatic release, ensuring maximum safety when lift is in stand position.

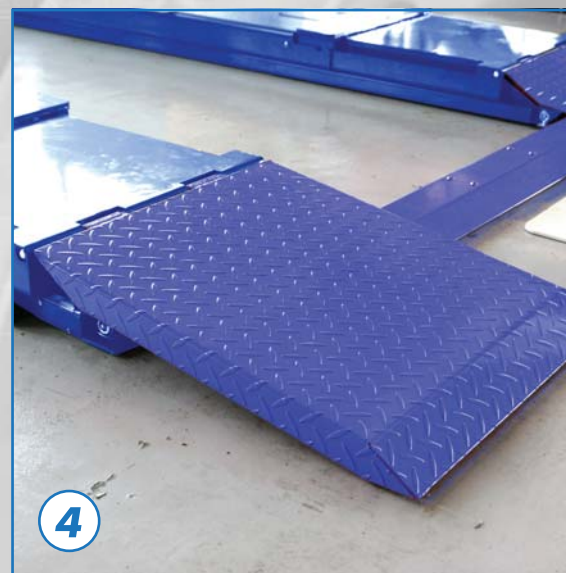


Extra low profile version(140mm)

The lifts is an ideal choice for low ground clearance vehicles of all types and in particular for extra low spoiler. The lift is strongly recommended for vehicles with variable height, or damaged suspensions.

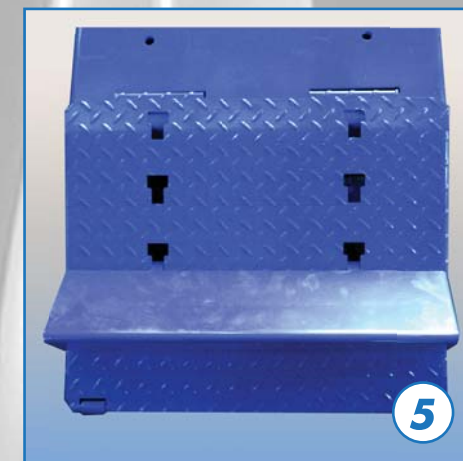

Adjustable extension ramp

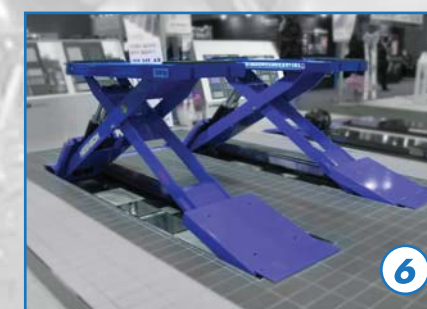

Inground type

For optional inground installation, spacer boxes are supplied to allow the lift to be lowered with the platforms extended.