

Accessory

Inflation gauge with pressure regulator



Standard Accessory



Option



Automatic digital Inflator
(Option)




Tire Lift (Option)



Adaptor for Motorcycle

Multiple Right Helper

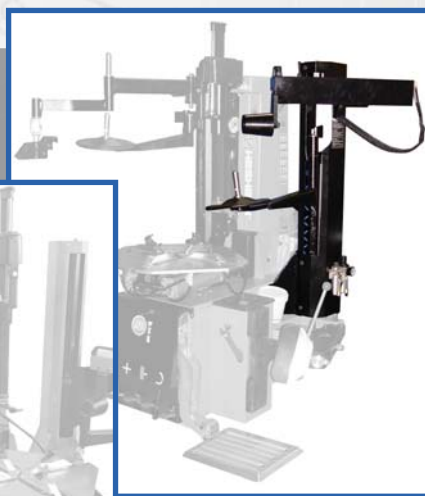

Right Press Arm



Left Helper Arm




Double Speed motor




LAYOUT


HT-200




HT-210






HT-220



HT-225



HELPER ARM



Specification

Model	HT-200	HT-210	HT-220	HT-225
Automatic digital Inflator	Option	Option	Option	Standard
Beed Breaker Force	2,500kg	2,500kg	3,200kg	3,200kg
Max. Turntable Torque	1,200Nm	1,200Nm	1,200Nm	1,200Nm
Max. Wheel Width	330 mm (13")			
Motor Power	0.75 KW			
Clamping Range	10"~24"			
Operating Pressure	10 bar (140psi)			
Max. Wheel Diameter	1,000 mm (39")			
Power Supply	110,220V / 50,60Hz / 1ph,3ph			
Weight	213kg	233kg	273kg	273kg



673-52, GYEONGSEO-DONG, SEO-GU, INCHEON, 404-170 KOREA
TEL:+82-1577-3520(Representative) / +82-32-585-3570(Int'l trading)
FAX:+82-32-585-3535 http://www.heshbon.com



High Performance TIRE CHANGER

HT-200/HT-210/HT-220/HT-225



TIRE CHANGER

High Performance

Professional HT-225

- * Jaw with zet-blaster for wide range of wheels(~24")
- * Semi-automatic 4 foot pedals.
- * Air bead breaker with double effect pneumatic cylinder
- * Pneumatic help device to facilitate the operation for mounting/removing low-profiled tires
- * Tools to minimize the damages of the aluminum wheels
- * Automatic digital Inflator(Optional)
- * Tilting post with pedal control
- * Versatile right help assist arm.

Feature (HT-225)




Jet Blaster



Mounting/removing device
for low-profiled tires



Tilting post



Pneumatic Locking
system




Jaw for wide range
of wheels(~24")
Max. tire diameter(~39")



Air bead breaker
(Double effect pneumatic
cylinder)



Automatic digital Inflator
(option)



Double speed motor
(option)



Tire Lift (option)

Deluxe HT-220

- * Jaw with zet-blaster for wide range of wheels(~24")
- * Semi-automatic 4 foot pedals.
- * Air bead breaker with double effect pneumatic cylinder
- * Pneumatic help device to facilitate the operation for mounting/removing low-profiled tires
- * Tools to minimize the damages of the aluminum wheels
- * Automatic digital Inflator(Optional)
- * Tilting post with pedal control

Feature (HT-220)



Jet Blaster



Mounting/removing device
for low-profiled tires



Tilting post



Pneumatic Locking
system



Jaw for wide range
of wheels(~24")
Max. tire diameter(~39")



Air bead breaker
(Double effect pneumatic
cylinder)



Automatic digital Inflator



Left helper arm



Super HT-210

- * Jaw with zet-blaster for wide range of wheels(~24")
- * Semi-automatic 4 foot pedals
- * Air bead breaker
- * Tilting post with pedal control
- * Tools to minimize the damages of the aluminum wheels
- * Automatic digital Inflator(Optional)


Feature(HT-210)



Tilting post



Air bead breaker



Pneumatic Locking
system



Max. Dimeter(~24")



Standard HT-200

- * Max. Tire Diameter (~24")
- * Semi-automatic 3 foot pedals.
- * Air bead breaker
- * Manual swing arm
- * Tools to minimize the damages of the aluminum wheels
- * Automatic digital Inflator(Optional)

Feature(HT-200)



Air bead breaker



Max. Dimeter(~24")