


WHEEL ALIGNMENT SCISSOR LIFT



HL-51G / 3.5ton

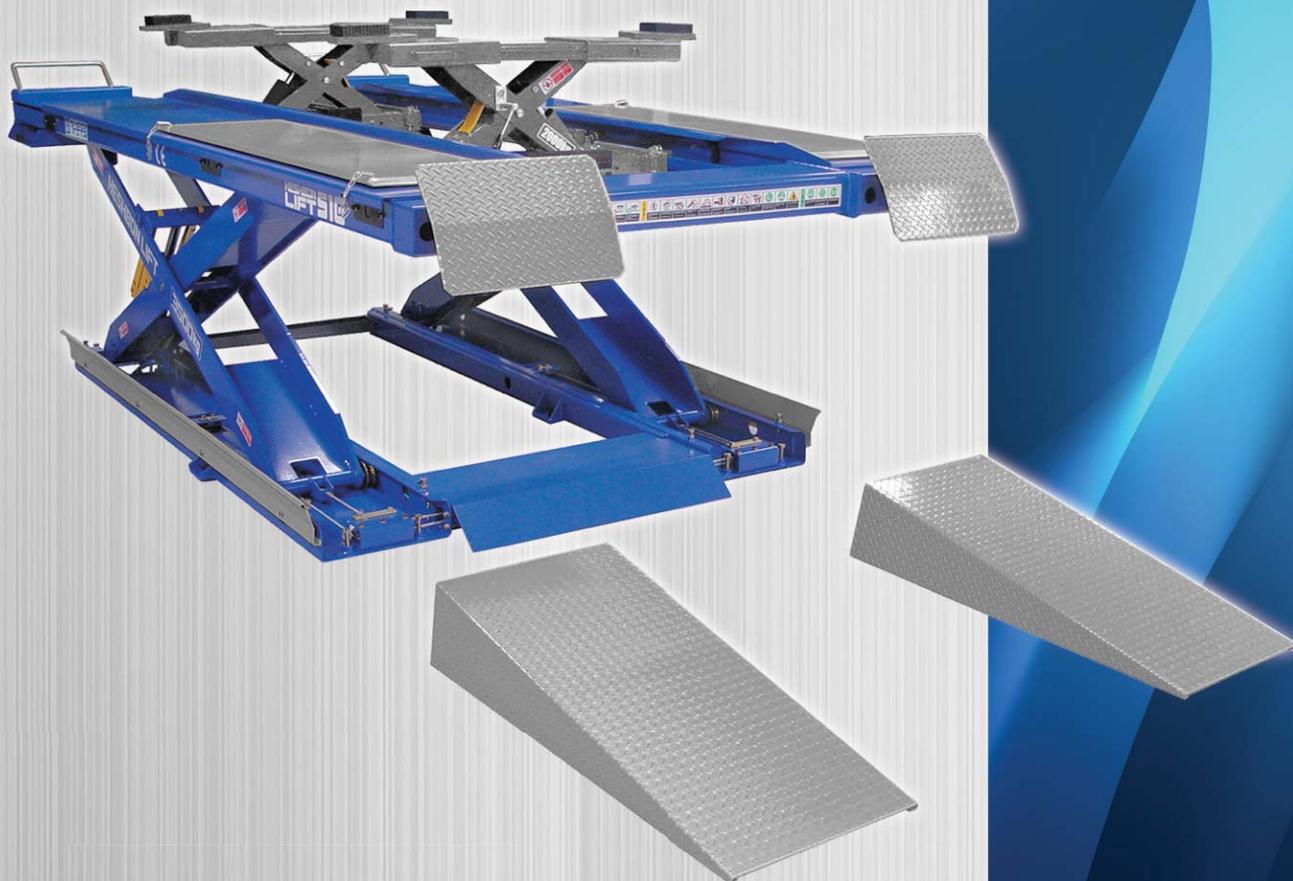

HESHBON®

• Specification of the model can be subject to change without prior notice.
• Copyright 2014 Heshbon co.,ltd. All rights reserved.



HL-51G / 3.5ton

- High-Performed durable hydraulic cylinders composed by double pressure seals.
- Sync. hydraulic block & torsion bar ensure High-Performed synchronization.
- Air cylinder operate locking device with automatic engagement and pneumatic release system ensure safety.
- Front turn-table recesses and rear sliding plates for 4-wheel alignment operation.
- Hydraulic two-level 2ton scissor jack. (OPTION)



1
Mechanical locking device
Mechanical locking device with automatic engagement and pneumatic release, ensuring maximum safety when lift is in standing position.



2
Synchronization system
Every time the platforms reach the floor, the lift is perfectly levelled thanks to a synchronization.



3
Lifts for wheel alignment
Lifts for wheel alignment with front recesses for turntables and rear slip plates.




4
Lifts for wheel alignment
Lifts for wheel alignment with front recesses for turntables and rear slip plates.



5
Rolling jack (Option)
Built in rolling jack with adjustable extensions to optimise vehicle loading.

>> LAY OUT

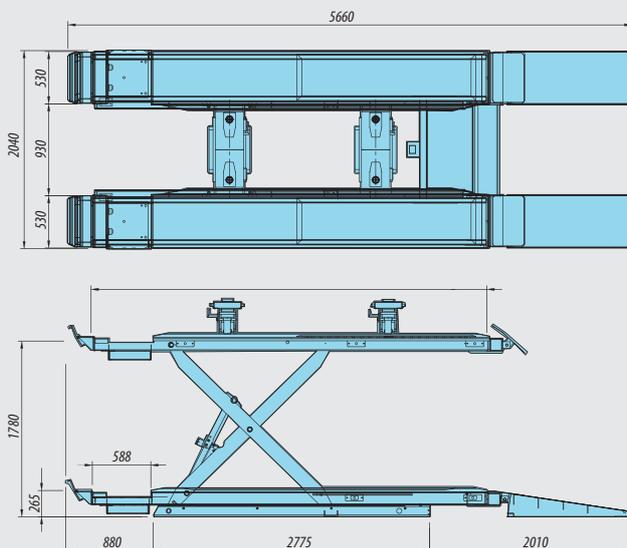

>> SPECIFICATION

Model No.	HL-51G
Lifting Capacity (kg)	Body : 3,500 kg / Jack : 2,000 kg
Min/Max.Lifting Height (mm)	265/1,780 mm
Dimension (mm)	5,660(L) X 2,040(W) X 265(H)
Power Supply & Motor	1ph : 2.5HP, 4P, 220V, 50/60 Hz 3ph : 2HP, 4P, 220/380V, 50/60 Hz
Lifting Time	40 ~ 60 sec.
Lowering Time	35 ~ 50 sec.
Weight	1,800 kg



HESHBON

108, Robot land-ro 249beon-gil, Seo-gu, Incheon 404-170, KOREA
 TEL:+82-1577-3520(Representative) / +82-32-585-3570(Overseas sales)
 FAX:+82-32-585-3535 http://www.heshbon.com e-mail:export@heshbon.com